


# PPS-3-P-E-B

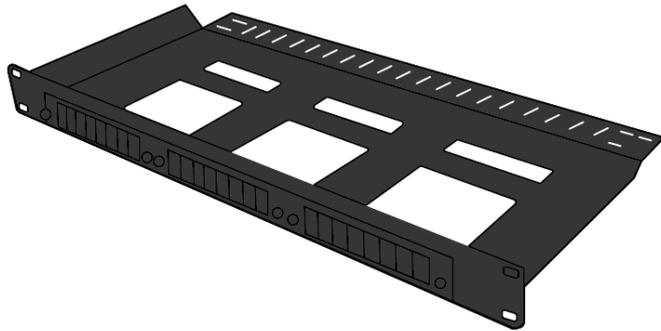

## Item Description

This innovative and robust 1U patch panel has been designed to accept up to 3 LGX Modules or MTP/MPO Cassettes within a 1U space.

With the ability to use a full array of adaptor types it offers a flexible solution to the end user, enabling them incorporate a multi-functional panel which allow easy access during installation or re-work with no disturbance of the existing cable or fibres.

Open tray Structure of panel allows for undisturbed and easy rear access to MPO/MTP ports and back bone trunks. Integrated rear cable management provides attachment points for incoming cable or excess cable loops.

In the addition to the array of adaptors the panel also offers multiple cable entry solutions, entry points for, loose tube, tight buffer, pre-terminated and steel tape armoured cable.

## Features/Benefits

- Up to 3 LGX MTP/MPO modules in 1U
- Multiple adaptor options available
- Individually labeled ports
- Accepts loose tube, distribution and pre-terminated cables
- RoHS, REACH and SvHC
- Fits standard 19"

## Applications

- Data centers, premise installations, telecommunication networks
- Ethernet, fibre channel, ATM, LAN, MAN and WAN
- Data communication
- Indoor applications

## Specifications

Element	Characteristic
Height	1U (44.4mm)
Width	483mm
Depth	240mm
Net Weight	1.0kgs
Packaged Weight	1.5kgs
Packaged Dimensions	525mm (W) x 90mm (H) x 295mm (D)
IP Rating	IP20
Suitable for Adaptor Type	LGX / MTP
Number of Ports	3
Material	Cold-rolled steel
Material Thickness	1.2mm
Material Coating	Electrostatic powder coating
Color	Black RAL 9004
Operating Temperature	-40°C to +60°C
Designed in Accordance With	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754,
Compliant to	RoHS, Reach/SVHC

## Technical drawing

